


## FJ Series Metal Hose

### Features

- General purpose all-metal hose.
- 316L stainless steel annular convoluted core.
- Size range of 1/4 through 2 in. and working pressures from vacuum to 1600 psig (110 bar).
- Single braid layer of 304 stainless steel promotes hose pressure containment.
- End connections welded in accordance with ASME Boiler and Pressure Vessel Code Section IX.
- Optional 316L stainless steel braid available to provide greater corrosion resistance.
- Commonly used in high-temperature vacuum or general purpose applications where permeation is undesirable.
- Custom assemblies available.
- Options include hose covers, hose tags, and additional helium leak testing. See page 103 for details.
- For electrical properties, see page 5 for details.

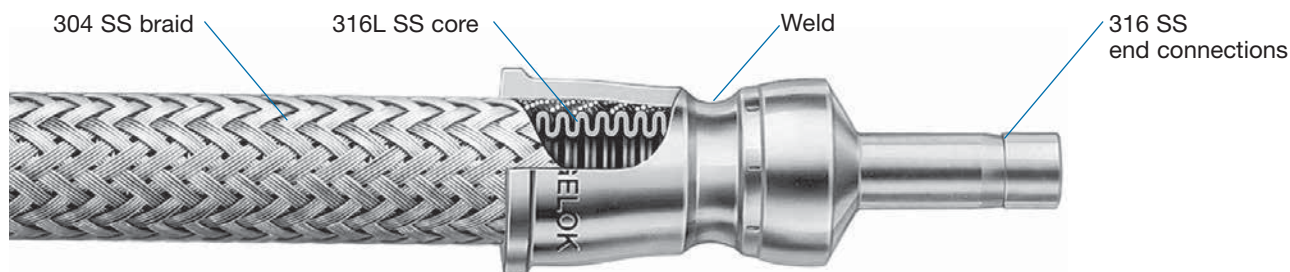

### Technical Data

Nominal Hose Size in. (mm)	Inside Diameter in. (mm)	Outside Diameter in. (mm)	Minimum Center Line Bend Radius in. (cm)		Temperature Range °F (°C)	Working Pressure at -325 to 300°F (-200 to 148°C) Vacuum to ... psig (bar)	Minimum Burst Pressure at 70°F (20°C) psig (bar)	Bulk Hose Weight lb/ft (kg/m)
			Static	Dynamic				
1/4 (6.4)	0.25 (6.4)	0.47 (11.9)	1.00 (2.54)	4.33 (11.0)	-325 to 800 (-200 to 426)	1600 (110)	6400 (440)	0.11 (0.16)
3/8 (9.7)	0.38 (9.5)	0.68 (17.3)	1.20 (3.05)	5.91 (15.0)		1470 (101)	5880 (405)	0.20 (0.30)
1/2 (12.7)	0.50 (12.7)	0.81 (20.5)	1.50 (3.81)	6.50 (16.5)		1110 (76.4)	4440 (306)	0.22 (0.33)
3/4 (19.0)	0.75 (19.0)	1.20 (30.5)	2.10 (5.33)	8.86 (22.5)		860 (59.2)	3440 (237)	0.37 (0.55)
1 (25.4)	1.00 (25.4)	1.50 (38.0)	2.70 (6.86)	10.2 (25.9)		680 (46.8)	2720 (187)	0.50 (0.74)
1 1/4 (31.8)	1.25 (31.8)	1.80 (45.7)	3.10 (7.87)	11.8 (30.0)		680 (46.8)	2720 (187)	0.61 (0.91)
1 1/2 (38.1)	1.50 (38.1)	2.13 (54.0)	3.90 (9.91)	13.4 (34.0)		520 (35.8)	2080 (143)	0.85 (1.26)
2 (50.8)	2.00 (50.8)	2.66 (67.5)	5.10 (13.0)	15.4 (39.1)		450 (31.0)	1800 (124)	1.10 (1.65)

### Pressure-Temperature Ratings


Ratings are based on ASME Code for Pressure Piping B31.3, Process Piping.

Nominal Hose Size, in.	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
Temperature °F (°C)	Working Pressure, vacuum to ... psig (bar)							
-325 (-200) to 300 (148)	1600 (110)	1470 (101)	1110 (76.4)	860 (59.2)	680 (46.8)	680 (46.8)	520 (35.8)	450 (31.0)
400 (204)	1488 (102)	1367 (94.1)	1032 (71.1)	800 (55.1)	632 (43.5)	632 (43.5)	484 (33.3)	419 (28.8)
500 (260)	1376 (94.8)	1264 (87.0)	955 (65.7)	740 (50.9)	585 (40.3)	585 (40.3)	447 (30.7)	387 (26.6)
600 (315)	1296 (89.2)	1191 (82.0)	899 (61.9)	697 (48.0)	551 (37.9)	551 (37.9)	421 (29.0)	365 (25.1)
700 (371)	1232 (84.8)	1132 (77.9)	855 (58.9)	662 (45.6)	524 (36.1)	524 (36.1)	400 (27.5)	347 (23.9)
750 (398)	1200 (82.6)	1103 (75.9)	833 (57.3)	645 (44.4)	510 (35.1)	510 (35.1)	390 (26.8)	338 (23.2)
800 (426)	1184 (81.5)	1088 (74.9)	821 (56.5)	636 (43.8)	503 (34.6)	503 (34.6)	385 (26.5)	333 (22.9)




## End Connections for B, X, S, C, J, N, W, F and U Series Hose

### Female ISO/BSP Parallel Threads (ISO 228)




ISO/BSP Parallel Thread Size in.	Nominal Hose Size Designator	End Connection Designator	Dimensions, in. (mm)			Pressure Rating psig (bar)
			A Max	Minimum Inside Diameter	Maximum Outside Dimension	
1/4	4	FS4	2.06 (52.3)	0.16 (4.0)	0.87 (22.1)	Determined by hose
3/8	6	FS6	2.57 (65.3)	0.26 (6.6)	1.09 (27.7)	
1/2	8	FS8	2.84 (72.1)	0.34 (8.6)	1.23 (31.2)	
3/4	12	FS12	3.39 (86.1)	0.54 (13.7)	1.59 (40.4)	
1	16	FS16	3.46 (87.9)	0.78 (19.8)	1.88 (47.8)	
1 1/2	24	FS24	4.29 (109)	1.24 (31.4)	2.60 (66.0)	
2	32	FS32	4.95 (126)	1.68 (42.6)	3.18 (80.8)	

### Female Swivel ISO/BSP Parallel Threads with 30° Cone




Swivel ISO/BSP Parallel Thread, 30° Cone Size in.	Nominal Hose Size Designator	End Connection Designator	Dimensions, in. (mm)			Pressure Rating psig (bar)
			A Max	Minimum Inside Diameter	Maximum Outside Dimension	
1/4	4	BS4	2.19 (55.6)	0.16 (4.0)	0.87 (22.1)	Determined by hose
3/8	6	BS6	2.72 (69.1)	0.26 (6.6)	1.01 (25.7)	
1/2	8	BS8	3.10 (78.7)	0.34 (8.6)	1.23 (31.2)	

### Female Swivel ISO/BSP Parallel Threads with 60° Cone



Swivel ISO/BSP Parallel Thread, 60° Cone Size in.	Nominal Hose Size Designator	End Connection Designator	Dimensions, in. (mm)			Pressure Rating psig (bar)
			A Max	Minimum Inside Diameter	Maximum Outside Dimension	
1/4	4	BM4	2.08 (52.8)	0.16 (4.0)	0.87 (22.1)	Determined by hose
3/8	6	BM6	2.59 (65.8)	0.26 (6.6)	1.01 (25.7)	
1/2	8	BM8	2.95 (74.9)	0.34 (8.6)	1.23 (31.2)	


### JIS(A)/ISO 2852-Type Sanitary<sup>①</sup>



① 316L SS material with an I.D. of 15 μin. (0.38 μm)  $R_a$  max surface finish applies prior to crimp.

JIS(A)/ISO 2852-Type Sanitary Size	Nominal Hose Size Designator	End Connection Designator		Dimensions, in. (mm)			Pressure Rating psig (bar)
		Standard Surface	Electro-polished	A Max	Minimum Inside Diameter	B, Flange Outside Diameter	
8A	6	JS8	JE8	2.16 (54.9)	0.26 (6.6)	1.34 (34.0)	500 (34.4)
10A	8	JS10	JE10	2.34 (59.4)	0.34 (8.6)		
15A	12	JS15	JE15	2.88 (73.2)	0.54 (13.7)		

### ISO-KF Vacuum Flange



ISO-KF Vacuum Flange Size mm	Nominal Hose Size Designator	End Connection Designator	Dimensions, mm (in.)				Pressure Rating bar (psig)
			A Max	Minimum Inside Diameter	B, Flange Outside Diameter	C, Flange Face Inside Diameter	
16	12	KF16	71.1 (2.80)	13.7 (0.54)	30.0 (1.18)	34.3 (1.35)	10.0 (145)
25	16	KF25	68.6 (2.70)	19.8 (0.78)	40.0 (1.57)	44.5 (1.75)	
40	24	KF40	82.6 (3.25)	31.4 (1.24)	55.0 (2.16)	55.9 (2.20)	
50	32	KF50	106 (4.16)	42.6 (1.68)	75.0 (2.95)	75.2 (2.96)	